

# LETTER OF COMPLIANCE




**Product Description:** Modular compressed air piping system 3/4" thru 6" Fastpipe

**Technical Specifications:** Compressed air, vacuum, and inert gas applications  
190 psi maximum working pressure, temp range 0°F to 140°F  
Compatible with common compressor lubricants


**General Ratings:** ASME B31.1  
UL94HB fire resistance, compliant to OSHA

## Pipe Specifications:

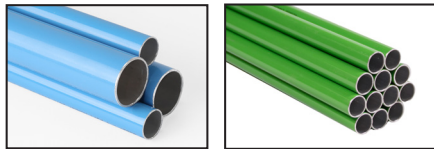

Material: Aluminum alloy grade 5042  
Blue powder coat, color RAL5012 outside 3/4" - 6"  
Green powder coat, color RAL6018 outside 3/4" 1 1/2"  
Non-chromate conversion coating inside  
Trade size callout measured with O.D.

3/4" size	20mm	.79 O.D. x .69 I.D.
1" size	25mm	.98 O.D. x .87 I.D.
1 1/2" size	40mm	1.57 O.D. x 1.43 I.D.
2" size	50mm	1.97 O.D. x 1.81 I.D.
3" size	80mm	3.15 O.D. x 2.98 I.D.
4" size	100mm	4.20 O.D. x 3.78 I.D.
6" size	150mm	6.02 O.D. x 5.75 I.D.



## Fitting Specifications:



*Compression Style*  
3/4" thru 2" Body: nylon 6 with fiberglass reinforcement, blue color  
3" Body: Diecast aluminum, then electrocoated, black color  
Bite Ring: stainless steel  
O-Ring: nitrile



*Compression Style*  
3" Body: Diecast aluminum, then electrocoated, black color  
Bite Ring: stainless steel  
O-Ring: nitrile



*Lug Style*  
4" - 6" Body: Diecast aluminum/Steel, Powdercoat  
Inner Seal: nitrile

**Engineered  
Specialties LLC**

6111 Mill Creek Drive, Auburndale, Wisconsin, 54412  
1-800-954-3310 • [www.rapidairproducts.com](http://www.rapidairproducts.com)

5-2020