

M3800 1/2" Master Kit

- (3) Air Outlets, 100 ft. 1/2" Tubing,
- (1) Manifold Kit,
- (1) Tee, Tools



1/2" Outlet Kit

M3810

(AIR CHUCK SOLD SEPARATELY)



Tee
M8010



Male NPT Fitting
M8001 3/8" NPT
M8002 1/2" NPT



Elbow
M8080



Pipeclip (10/pkg)
M8064



1/2" Tubing Kit
M6026 100 ft.
M6027 300 ft.



Union
M8021

MAXLINE[®]

BY RAPIDAIR



USE 1/2" MaxLine:

- Tubing lengths up to 75 ft. from the compressor
- Building size up to 2000 sq. ft.
- 1 to 2 air users
- In wall or surface mounted tubing
- 30 cfm max flow rate (up to 5 hp compressor)



USE 3/4" MaxLine:

- Tubing lengths up to 150 ft. from the compressor
- Building size up to 4000 sq. ft.
- Multiple air users
- Surface mounted tubing
- 50 cfm max flow rate (up to 10 hp compressor)

MAXLINE[®]

BY RAPIDAIR

Tools & Installation



CUT the tubing square with the cutter, ROTATING wrist while cutting



BEVEL the inside of the tubing by inserting the reaming tool and rotating it at least 3 full turns. Remove nut and split ring from fitting and place on tubing



PUSH the fitting onto the tubing and fully against the shoulder of the fitting (soapy water will help this process)



TURN the nut hand tight. Put a reference mark on the nut and fitting body



TIGHTEN nut with wrench a minimum of 3/4 of a turn or until tight



MAXLINE[®]

BY RAPIDAIR

Compressed Air Piping System



Engineered Specialties LLC
1-800-954-3310 • Auburndale, WI
www.rapidairproducts.com

WARNINGS

- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
- Always use eye protection when using compressed air.
- Turn off compressor when not in use
- CA Prop 65: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.



Retail 1/2" & 3/4"



1/2" I.D.
5/8" O.D.

HDPE
Aluminum
HDPE

MAXLINE[®]
BY RAPIDAIR

See 3/4" on other side





is an industrial compressed air piping system that is:

- fast and easy to install
- cost effective
- leak proof
- corrosion resistant

MaxLine's multilayer construction can be easily bent by hand and maintain its desired shape, giving a professional appearance with no tubing sag. Rolls allow for faster installation times, with fewer joints. Its smooth interior walls will never build up scale or rust making it an efficient air system.

MaxLine piping can be mounted on wall surfaces, in wall for new construction and be directly buried under ground or concrete. This system is easily configured and can be modified.

MaxLine fittings are nickel plated brass designed for years of long term performance. Its double o-ring compression design is engineered to be a leak proof system, that can be easily disassembled and reused.

Sizes: 1/2", 3/4", 1", 2"
Rolls up to 300 ft.



- Operating Pressure
200 psi at 73°F
160 psi at 140°F
- Meets OSHA guidelines
- Complies with ASTM F1282
- Temperature Range -40°F to 140°F
- Compatible with common compressor oils




MaxLine will hold any bent shape



- Nickel plated brass
- Double o-ring design
- Split ring allows disassembly
- No expensive tools required


Bend Radius:
1/2" MaxLine: 4-6 inches
3/4" MaxLine: 6-8 inches



Surface Mount



Exterior Mount



Hidden Tubing



M7500 3/4" Master Kit



(3) Air Outlets,
100 ft. 3/4" Tubing,
Tools, (2) Tees,
(1) 3/4" MNPT
Straight,
(20) Clips



3/4" Outlet Kit
M7510
(AIR CHUCK SOLD SEPARATELY)



3/4" x 1/2" x 3/4" Reducing Tee
M8014



Tee
M8011



Male NPT Fitting
M8003 3/4" NPT
M8005 1/2" NPT




Elbow
M8067




Pipeclip (10/pkg)
M8065



3/4" Tubing Kit
M6030 100 Ft.
M6031 300 ft.



Union
M8022

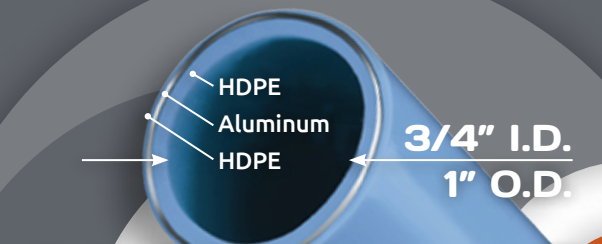

MAXLINE
BY RAPIDAIR

See 1/2" on other side