

## Letter of Compliance

### Product Application

Compressed air  
Inert gases such as Nitrogen, Argon, CO2  
Non-Potable Water

### Technical Specification



Operating pressure 232 psi  
Operating Temperature -40°F to +140°F  
Vacuum Rating to 29 Hg

### System Ratings

ASTMF1282  
ASTMF3347  
OSHA Compliant

### Flexible Tubing Specifications

Multi-layer Tubing, inner-outer HDPE, center layer-alum overlap welded  
Blue or Green Color outer layer, white inner layer  
Tubing can be direct buried under ground, wrap fittings for protection  
Cover or paint if installed in outside applications to protect from UV

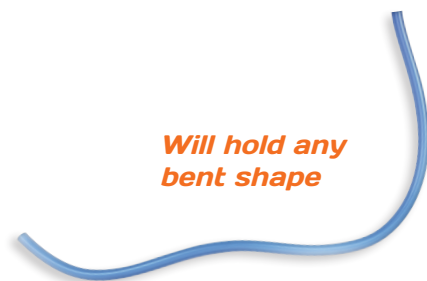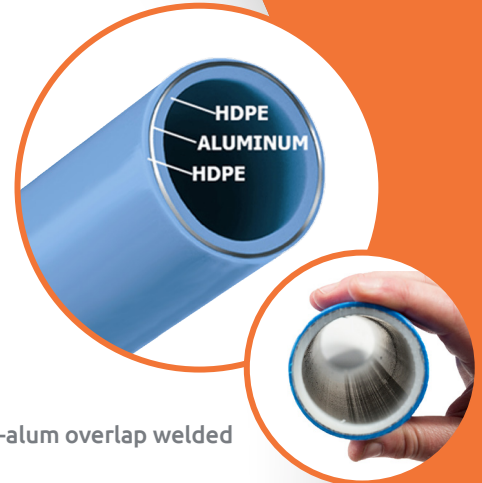

**Will hold any bent shape**

### **Bend Radius:**

- 1/2" Tubing: 4-6 inches
- 3/4" Tubing: 8-10 inches
- 1" Tubing: 10-12 inches
- 2" Tubing 36-40 inches



### Fitting Specifications

Press Type  
Nickel plated brass body  
304 Stainless Steel Crimp Sleeve  
Double Nitrile Oring seal



PRODUCTS MANUFACTURED BY THE SELLER CARRY A LIMITED ONE YEAR WARRANTY

RapidAir Products | [www.rapidairproducts.com](http://www.rapidairproducts.com)  
6111 Mill Creek Drive Auburndale, WI 54412 | 800-954-3310

07-2022 Rev 1