

LETTER OF COMPLIANCE




Product Description: Modular compressed air piping system 3/4" thru 6" Fastpipe


Technical Specifications: Compressed air, vacuum, and inert gas applications
190 psi maximum working pressure, temp range 0°F to 140°F
Compatible with common compressor lubricants

General Ratings: ASME B31.1
UL94HB fire resistance, compliant to OSHA

Pipe Specifications:

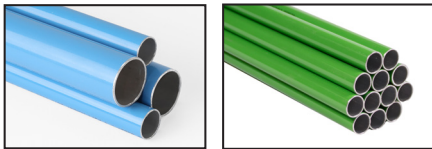

Material: Aluminum alloy grade 5042
Blue powder coat, color RAL5012 outside 3/4" - 6"
Green powder coat, color RAL6018 outside 3/4" 1/2"
Non-chromate conversion coating inside
Trade size callout measured with O.D.

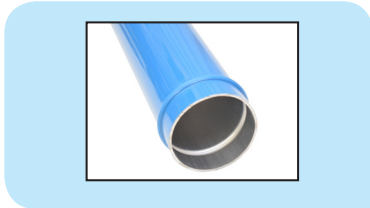

3/4" size	20mm	.79 O.D. x .69 I.D.
1" size	25mm	.98 O.D. x .87 I.D.
1 1/2" size	40mm	1.57 O.D. x 1.43 I.D.
2" size	50mm	1.97 O.D. x 1.81 I.D.
3" size	80mm	3.15 O.D. x 2.98 I.D.
4" size	100mm	4.20 O.D. x 3.78 I.D.
6" size	150mm	6.02 O.D. x 5.75 I.D.

Fitting Specifications:



Compression Style
3/4" thru 2" Body: nylon 6 with fiberglass reinforcement, blue color
3" Body: Diecast aluminum, then electrocated, black color
Bite Ring: stainless steel
O-Ring: nitrile



Compression Style
3" Body: Diecast aluminum, then electrocated, black color
Bite Ring: stainless steel
O-Ring: nitrile



Lug Style
4" - 6" Body: Diecast aluminum/Steel, Powdercoat
Inner Seal: nitrile

**Engineered
Specialties LLC**

6111 Mill Creek Drive, Auburndale, Wisconsin, 54412
1-800-954-3310 • www.rapidairproducts.com

3/2018