



# #CP-0190 MOTORIZED COMPRESSOR SHUT OFF VALVE

open or closed  
indicator

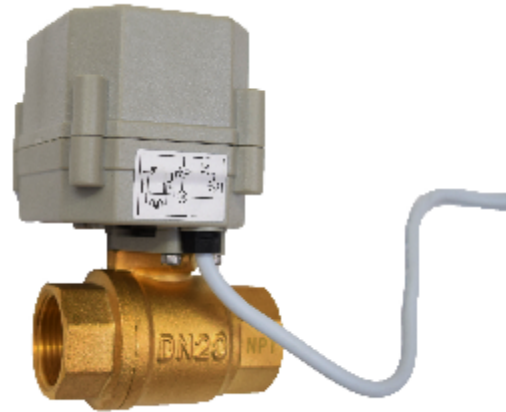

## Electrical Schematic

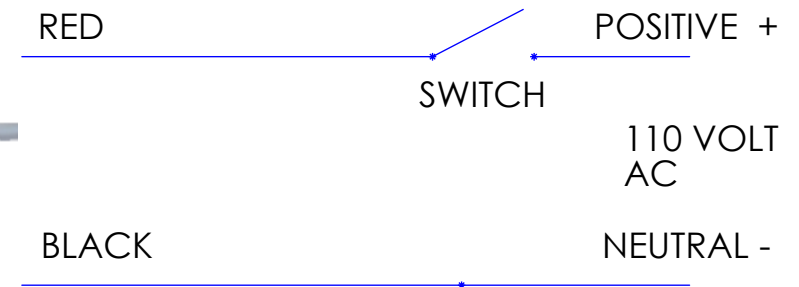

## SPECIFICATIONS

- 230 PSI MAX INLET
- 3/4 NPT THREADS
- CAN BE MOUNTED IN ANY FLOW DIRECTION
- 110 VOLT AC
- 100 MILLI AMPS (.1AMP)
- OPEN TIME 12 SECONDS
- CE MARKED, DOUBLE INSULATED

## INSTALLATION

Assemble the npt threads with two wraps of teflon tape AND then pipe sealant which prevents thread galling

Install wiring connections per local code

ENGINEERED SPECIALTIES, LLC  
RAPIDAIR PRODUCTS  
www.rapidairproducts.com  
800-954-3310 1-2017

## OPERATION

Switch closed (ON), the valve will open and then power down

Switch open (OFF), the valve will close

Spring return closed if power failure

## WARNINGS:

- Not for Oxygen service or potable water.
- Check local building codes before installation.
- Compressed air is dangerous if not used properly.
- Do not point compressed air source at any part of your body or at any person.
- Always use eye protection when using compressed air.
- Turn off air compressor when not in use.

CAPROP65: This product contains chemicals, including lead, known to the State of California to cause birth defects or other reproductive harm.

Wash hands after handling.

Contains lead:

MAY BE HARMFUL IF EATEN OR CHEWED. MAY GENERATE DUST CONTAINING LEAD. KEEP OUT OF THE REACH OF CHILDREN.